PRINT DATA

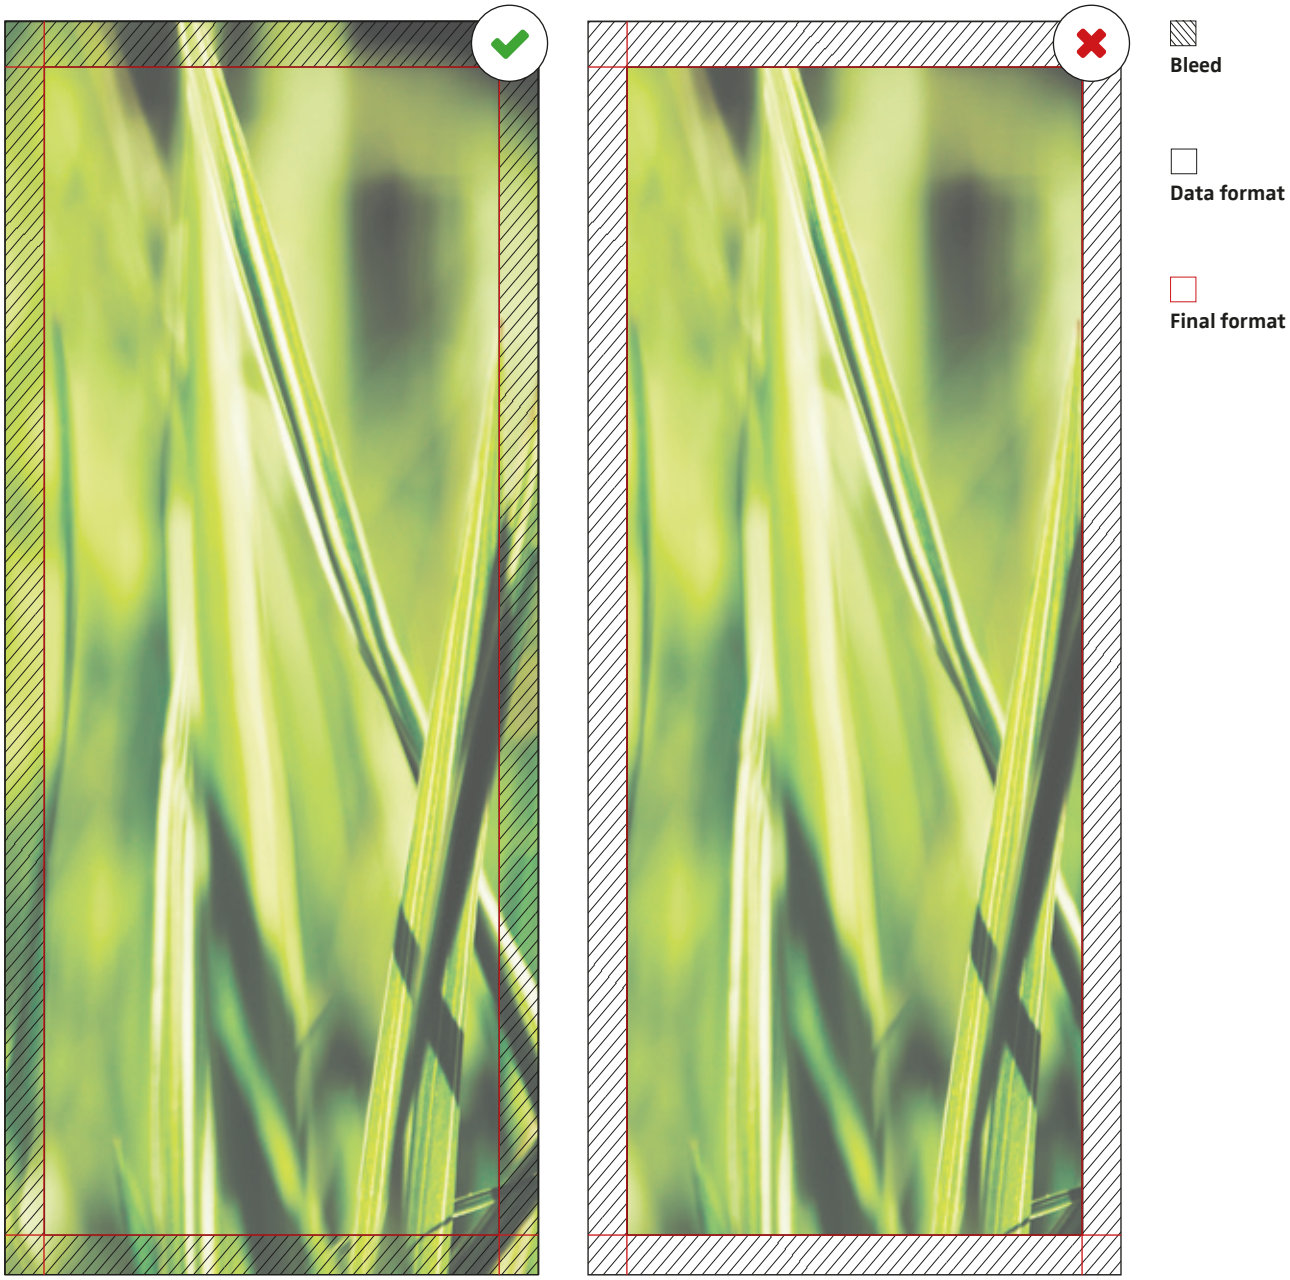

PIXLIP®

JPG, TIFF only for image files

PDF files

PDF/X-3:2002 standard
PDF version must be 1.3
all fonts must be converted to paths or be embedded
Do not apply crop, bleed or registration marks

CMYK or greyscales, 8 Bits/Channel

Screen colors (RGB) cannot be processed
Special colors must be converted to CMYK colors
(approximate values of the manufacturer)
Color profile: ISO Coated v2 (ECI) available at www.eci.org
Black: C = 87%, M = 78%, Y = 65% und K = 100%
Grey: C = 0%, M = 0%, Y = 0% und K = 0-100%

Aa at least 8 mm font height

20 mm bleed

The bleed describes the area outside the cut that is sewn to the rubber lip after printing. In order to avoid white stripes it should be 20 mm per side length. The graphics of the print file must fill the entire bleed area.

End format	Data format
1000 × 1000 mm	1040 × 1040 mm
1000 × 1500 mm	1040 × 1540 mm
850 × 2000 mm	890 × 2040 mm
1000 × 2000 mm	1040 × 2040 mm
850 × 2500 mm	890 × 2540 mm
850 × 2250 mm	890 × 2290 mm
1000 × 2250 mm	1040 × 2290 mm
2000 × 2250 mm	2040 × 2290 mm
3000 × 2250 mm	3040 × 2290 mm
1000 × 2500 mm	1040 × 2540 mm
2000 × 2000 mm	2040 × 2040 mm
3000 × 2000 mm	3040 × 2040 mm
2000 × 2500 mm	2040 × 2540 mm
3000 × 2500 mm	3040 × 2540 mm

72 dpi resolution

in a ratio of 1:1 at least 72 dpi
in a ratio of 1:10 at least 720 dpi

PIXLIP GO®